

Q.MAXX-G5+ SERIES



405-415 Wp | 108 Cells
21.3 % Maximum Module Efficiency

MODEL Q.MAXX-G5+



A reliable investment

Inclusive 25-year product warranty and 25-year linear performance warranty¹.



Enduring high performance

Long-term yield security with Anti LeTID Technology and Hot-Spot Protect.



The most thorough testing programme in the industry

Qcells is the first solar module manufacturer to pass the most comprehensive quality programme in the industry: The new "Quality Controlled PV" of the independent certification institute TÜV Rheinland.



More suitable size for residential installation

With its length less than 1722 mm, Q.MAXX-G5+ provides with easier system designs and installations.



Breaking the 21% efficiency barrier

Q.ANTUM DUO Technology with optimized module layout boosts module power.



Extreme weather rating

High-tech aluminium alloy frame, certified for high snow (8100 Pa) and wind loads (4000 Pa).



Innovative all-weather technology

Optimal yields, whatever the weather with excellent low-light and temperature behaviour.

¹ See data sheet on rear for further information.

The ideal solution for:




Rooftop arrays on residential buildings



Q.MAXX-G5+ SERIES

Mechanical Specification


Format	1722 mm × 1134 mm × 30 mm (including frame)
Weight	21.1 kg
Front Cover	3.2 mm thermally pre-stressed glass with anti-reflection technology
Back Cover	Composite film
Frame	Black anodised aluminium
Cell	6 × 18 monocrystalline Q.ANTUM solar half cells
Junction box	53-101 mm × 32-60 mm × 15-18 mm Protection class IP67, with bypass diodes
Cable	4 mm ² Solar cable; (+) ≥ 1265 mm, (-) ≥ 1265 mm
Connector	Stäubli MC4, Hanwha Q CELLS HQC4; IP68

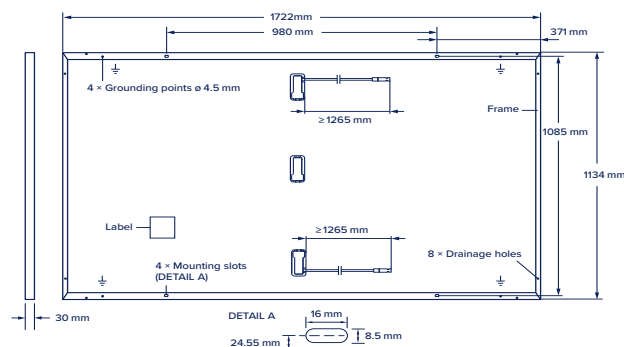

Electrical Characteristics

POWER CLASS				405	415
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC ¹ (POWER TOLERANCE +5 W/-5 W)					
Minimum	Power at MPP ¹	P _{MPP}	[W]	405	415
	Short Circuit Current ¹	I _{SC}	[A]	13.91	13.99
	Open Circuit Voltage ¹	V _{OC}	[V]	37.09	37.14
	Current at MPP	I _{MPP}	[A]	13.23	13.37
	Voltage at MPP	V _{MPP}	[V]	30.62	31.05
	Efficiency ¹	η	[%]	≥ 20.7	≥ 21.3
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT ²					
Minimum	Power at MPP	P _{MPP}	[W]	303.8	311.3
	Short Circuit Current	I _{SC}	[A]	11.21	11.27
	Open Circuit Voltage	V _{OC}	[V]	34.97	35.03
	Current at MPP	I _{MPP}	[A]	10.41	10.53
	Voltage at MPP	V _{MPP}	[V]	29.20	29.56

¹Measurement tolerances P_{MPP} ± 3%; I_{SC}, V_{OC} ± 5% at STC: 1000 W/m², 25 ± 2 °C, AM 1.5 according to IEC 60904-3 • ²800 W/m², NMOT, spectrum AM 1.5

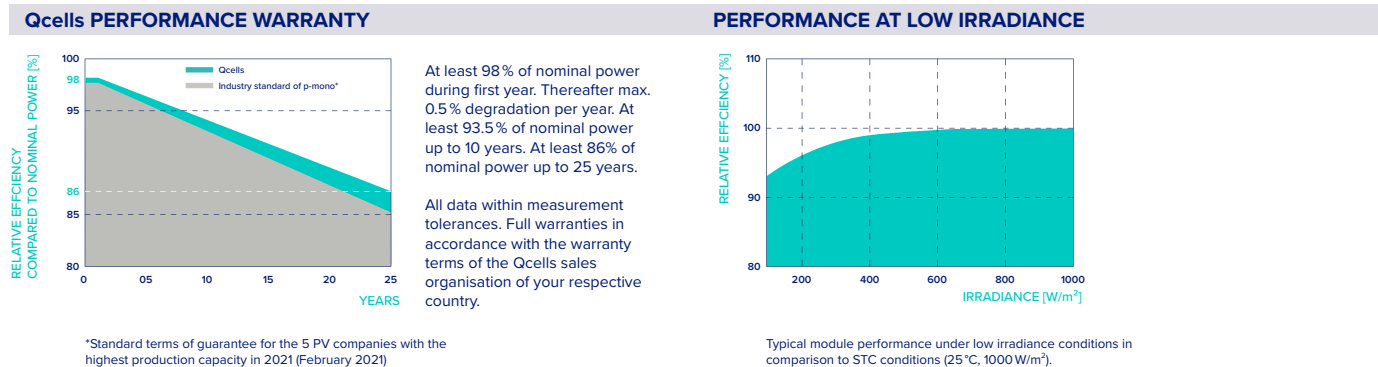

TEMPERATURE COEFFICIENTS							
Temperature Coefficient of I_{sc}	α	[%/K]	+0.04	Temperature Coefficient of V_{oc}	β	[%/K]	-0.27
Temperature Coefficient of P_{MPP}	γ	[%/K]	-0.34	Nominal Module Operating Temperature	NMOT	[°C]	43±3

Properties for System Design

Maximum System Voltage	V _{sys}	[V]	1000	PV module classification	Class II
Maximum Reverse Current	I _R	[A]	25	Fire Rating based on ANSI/UL 61730	C/TYPE 2
Max. Design Load, Push/Pull	[Pa]	5400/2665		Permitted Module Temperature on Continuous Duty	-40 °C - +85 °C
Max. Test Load, Push/Pull	[Pa]	8100/4000			

Qualifications and Certificates

Quality Controlled PV -
TÜV Rheinland;
IEC 61215:2016;
IEC 61730:2016.
This data sheet complies
with DIN EN 50380.



Made in China

Packaging Information

1764 mm	1130 mm	1270 mm	797.6 kg	30 pallets	26 pallets	36 module
---------	---------	---------	----------	------------	------------	-----------



Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.
Hanwha Q CELLS Australia Pty Ltd. Suite 1, Level 1, 15 Blue Street, North Sydney, NSW 2060, Australia | TEL +61 02 9016 3033 | EMAIL inquiry.aus@qcells.com | WEB www.qcells.com/au/

qcells